



Press the media under the guides.




Align the sensor to the center of the roll for regular labels.



Open the printer and remove the packing.



Pull the end of the roll past the front edge of the printer.



Align the sensor to the edge of the roll for marked labels.




Zebra Technologies | 3 Overlook Point | Lincolnshire, IL 60069 USA - zebra.com

ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. © 2020 Zebra Technologies Corp. and/or its affiliates. All rights reserved.





Push down on the front edge of the printer until it locks.

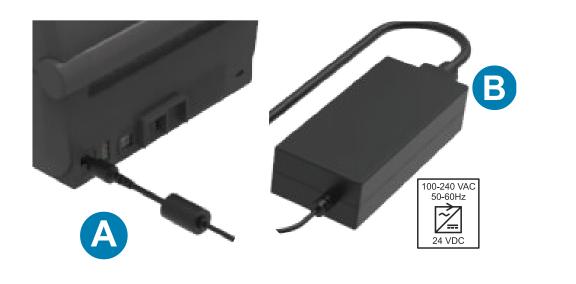

A. Plug the power supply into the printer. B. Plug the power cable into the power supply.

## 8 Power On



When the the printer is ready, the printer status light will turn green.

i Media Out

labels.

## **1** Support and Information



Need to design a label? zebra.com/zebradesigner View user documentation and how-to videos. zebra.com/zd621d-info





Need to manage your printer? zebra.com/ppme Contact Zebra about your printer. zebra.com/contact





Need to secure your printer? zebra.com/printsecure


Learn about genuine Zebra supplies. zebra.com/supplies



When the media run out, the printer and media status lights will turn red.

Open the printer and discard the empty roll.

7 Connect USB

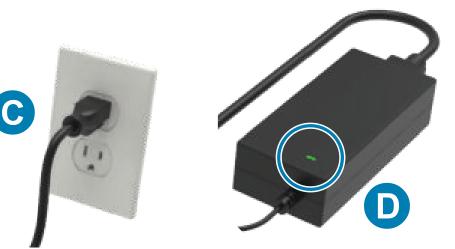



C. Plug the power cord into an appropriate receptacle. D. The power supply lights green.

Connect a USB cable to the printer, connect the other end to your computer.

## **9** Smart Calibration



Press and hold the Pause and Cancel buttons for two seconds to line up the

## **10** Print Configuration Report



Press and hold the Feed and Cancel buttons for two seconds to print a configuration report.







Clean printhead with a cleaning pen. Clean from the middle to the outside. Do not use a cleaning pen on the platen.